
**Information technology — Generic coding
of moving pictures and associated audio
information —**

**Part 6:
Extensions for DSM-CC**

*Technologies de l'information — Codage générique des images animées
et des informations sonores associées —*

Partie 6: Extensions pour DSM-CC

CONTENTS

0. INTRODUCTION	XIX
0.1 Guiding Factors in the Formulation of DSM-CC	xix
0.2 DSM-CC Client-Network-Server Model	xx
0.3 Outline of the DSM-CC Specification	xx
0.3.1 User-to-Network	xx
0.3.2 User-to-User	xxi
0.4 Supported Network Technologies	xxi
0.5 Supported Connection Types	xxi
0.6 DSM-CC Interfaces	xxi
0.7 DSM-CC Interface Protocols	xxiii
0.8 Communications Requirements	xxv
0.9 Methods of Specification	xxv
0.9.1 Messages	xxv
0.9.2 Message Flow Diagram Scenarios	xxvi
0.9.3 Specification and Description Language	xxvi
0.9.4 Interface Definition Language (IDL)	xxviii
0.9.5 Remote Procedure Call (RPC)	xxviii
0.9.5.1 Independence of RPC	xxix
0.9.5.2 Preferred and Default RPC	xxix
0.9.5.3 Local Equivalent Functions	xxix
1. GENERAL	1
1.1 Scope	1
1.2 Profiles and Compliance	1
1.2.1 Functional Categories of the DSM-CC protocols	1
1.2.2 User-to-Network Session Messages	2
1.2.2.1 U-N Core Session Message Functional Groups	2
1.2.2.2 U-N Extended Session Message Functional Groups	2
1.2.3 User-User Interfaces	2
1.2.3.1 U-U Core Interfaces	2
1.2.3.2 U-U Extended Interfaces	3
1.3 Definitions	3
1.4 Acronyms	4
1.5 Normative References	6
2. DSM-CC MESSAGE HEADER	7
2.1 DSM-CC Adaptation Header Format	8
2.1.1 DSM-CC Conditional Access Adaptation Format	9
2.1.2 DSM-CC User ID Adaptation Format	9
3. USER-TO-NETWORK CONFIGURATION MESSAGES	10
3.1 Overview and the General Message Format	10
3.2 User-to-Network configuration parameters	10
3.2.1 DSM-CC specific configuration parameters	10
3.2.2 Network specific configuration parameters	11
3.2.3 User defined configuration parameters	12

© ISO/IEC 1998

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

3.3	User to Network Configuration Messages	12
3.3.1	UNConfigRequest message definition	13
3.3.2	UNConfigConfirm message definition	13
3.3.3	UNConfigIndication message definition	14
3.3.4	UNConfigResponse message definition	14
3.4	User-to-Network Configuration Message Field Data Types	15
3.5	User Initiated UNConfigRequest message Sequence	15
3.6	Network Initiated UNConfigIndication message Sequence	16
3.7	Broadcasting of UNConfigIndication messages	16
3.8	Mixed User/Network Initiated Configuration Sequences	17
3.9	User-to-Network Configuration Reason Codes	17
3.10	User-to-Network Configuration Response Codes	17
4.	USER-TO-NETWORK SESSION MESSAGES	19
4.1	Overview and the General Message Format	19
4.2	Session Messages	19
4.2.1	U-N Functional groups	23
4.2.1.1	U-N Core Group	23
4.2.1.2	Extended Functional groups	24
4.2.2	Use of UserData() structure in session messages	24
4.2.3	Use of Resources() structure in session messages	25
4.2.4	Session Set-Up group message definitions	25
4.2.4.1	ClientSessionSetUpRequest	25
4.2.4.2	ClientSessionSetUpConfirm	26
4.2.4.3	ServerSessionSetUpIndication	27
4.2.4.4	ServerSessionSetUpResponse	27
4.2.5	Session Release group message definitions	28
4.2.5.1	ClientSessionReleaseRequest	28
4.2.5.2	ClientSessionReleaseConfirm	29
4.2.5.3	ClientSessionReleaseIndication	29
4.2.5.4	ClientSessionReleaseResponse	29
4.2.5.5	ServerSessionReleaseRequest	30
4.2.5.6	ServerSessionReleaseConfirm	30
4.2.5.7	ServerSessionReleaseIndication	31
4.2.5.8	ServerSessionReleaseResponse	31
4.2.6	Add Resource group message definitions	32
4.2.6.1	ClientAddResourceIndication	32
4.2.6.2	ClientAddResourceResponse	32
4.2.6.3	ServerAddResourceRequest	33
4.2.6.4	ServerAddResourceConfirm	33
4.2.7	Delete Resource group message definitions	34
4.2.7.1	ClientDeleteResourceIndication	34
4.2.7.2	ClientDeleteResourceResponse	35
4.2.7.3	ServerDeleteResourceRequest	35
4.2.7.4	ServerDeleteResourceConfirm	36
4.2.8	Continuous Feed Session group message definitions	36
4.2.8.1	ServerContinuousFeedSessionRequest	36
4.2.8.2	ServerContinuousFeedSessionConfirm	37
4.2.9	Status group message definitions	37
4.2.9.1	ClientStatusRequest	37
4.2.9.2	ClientStatusConfirm	38
4.2.9.3	ClientStatusIndication	38
4.2.9.4	ClientStatusResponse	38
4.2.9.5	ServerStatusRequest	39
4.2.9.6	ServerStatusConfirm	39
4.2.9.7	ServerStatusIndication	40
4.2.9.8	ServerStatusResponse	40

4.2.10	Reset group message definitions.....	41
4.2.10.1	ClientResetRequest.....	41
4.2.10.2	ClientResetConfirm.....	41
4.2.10.3	ClientResetIndication.....	42
4.2.10.4	ClientResetResponse.....	42
4.2.10.5	ServerResetRequest.....	42
4.2.10.6	ServerResetConfirm.....	43
4.2.10.7	ServerResetIndication.....	43
4.2.10.8	ServerResetResponse.....	43
4.2.11	Session Proceeding group message definitions.....	44
4.2.11.1	ClientSessionProceedingIndication.....	44
4.2.11.2	ServerSessionProceedingIndication.....	44
4.2.12	Connect group message definitions.....	44
4.2.12.1	ClientConnectRequest.....	44
4.2.12.2	ServerConnectIndication.....	45
4.2.13	Session Transfer group message definitions.....	45
4.2.13.1	ClientSessionTransferIndication.....	45
4.2.13.2	ClientSessionTransferResponse.....	46
4.2.13.3	ServerSessionTransferRequest.....	46
4.2.13.4	ServerSessionTransferConfirm.....	47
4.2.13.5	ServerSessionTransferIndication.....	47
4.2.13.6	ServerSessionTransferResponse.....	48
4.2.14	Session In Progress group message definitions.....	49
4.2.14.1	ClientSessionInProgress.....	49
4.2.14.2	ServerSessionInProgress.....	49
4.3	User-to-Network Session Message Field Data Types.....	49
4.4	Reason Codes.....	52
4.5	Response Codes.....	53
4.6	MPEG-2 DSM-CC statusTypes.....	55
4.7	Resource Descriptors.....	56
4.7.1	DSM-CC User-to-Network Resource Descriptor.....	56
4.7.2	Specifying Ranges and Lists of values in resource descriptors.....	62
4.7.3	Horizontal Association of Resource Descriptors.....	64
4.7.4	Vertical Resource Sharing.....	64
4.7.5	Resource Descriptor Definitions.....	65
4.7.5.1	ContinuousFeedSession resource descriptor definition.....	66
4.7.5.2	AtmConnection resource descriptor definition.....	67
4.7.5.3	MpegProgram resource descriptor definition.....	67
4.7.5.4	Physical Channel resource descriptor definition.....	68
4.7.5.5	TSUpstreamBandwidth resource descriptor definition.....	69
4.7.5.6	TSDownstreamBandwidth resource descriptor definition.....	69
4.7.5.7	AtmSvcConnection resource descriptor definition.....	70
4.7.5.8	ConnectionNotify resource descriptor definition.....	70
4.7.5.9	IP resource descriptor definition.....	70
4.7.5.10	ClientTdmaAssignment resource descriptor definition.....	71
4.7.5.11	PSTNSetup resource descriptor definition.....	71
4.7.5.12	NISDNSetup resource descriptor definition.....	71
4.7.5.13	NISDNConnection resource descriptor definition.....	72
4.7.5.14	Q922Connections resource descriptor definition.....	72
4.7.5.15	SharedResource resource descriptor definition.....	72
4.7.5.16	SharedRequestId resource descriptor definition.....	72
4.7.5.17	HeadEndList resource descriptor definition.....	73
4.7.5.18	AtmVcConnection resource descriptor definition.....	73
4.7.5.19	SdbContinuousFeed resource descriptor definition.....	74
4.7.5.20	SdbAssociations resource descriptor definition.....	74
4.7.5.21	SdbEntitlement resource descriptor definition.....	75
4.8	Client Initiated Command Sequences.....	75

4.8.1	Client Session Set-Up Command Sequence	76
4.8.1.1	Client Initiates Session Set-Up Request	76
4.8.1.2	Network Rejects Client Session Request	78
4.8.1.3	Server Rejects Server Session Indication	78
4.8.1.4	Client Has Final UserData()	79
4.8.1.5	Client Initiates Early Release	79
4.8.1.6	Server Does not respond to serverSessionSetUpIndication	80
4.8.1.7	Network Rejects Server's Resource AllocationStep 7 (Network):	80
4.8.1.8	Client Unable to Use Resources	80
4.8.2	Client Session Release Command Sequence	81
4.8.2.1	Client Initiates Release Request	81
4.8.2.2	Network Rejects Client Release Request	82
4.8.2.3	Server Rejects Server Release Indication	82
4.8.3	Client Initiated Status Command Sequence	82
4.9	Server Initiated Command Sequences	83
4.9.1	Server Continuous Feed Session Set-Up Command Sequence	83
4.9.1.1	Server Initiates Continuous Feed Session Set-Up	84
4.9.2	Server Add Resource Command Sequence	84
4.9.2.1	Server Initiates Add Resource Request	85
4.9.3	Server Session Delete Resource Command Sequence	86
4.9.4	Server Session Release Command Sequence	87
4.9.4.1	Server Initiates Release Request	87
4.9.4.2	Network Rejects Server Release Request	88
4.9.4.3	Client Rejects Client Release Indication	88
4.9.5	Server Continuous Feed Session Release Command Sequence	88
4.9.5.1	Server Initiates Continuous Feed Session Release Request	89
4.9.5.2	Network Rejects Server Release Request	90
4.9.5.3	Client Rejects Client Release Indication	90
4.9.6	Server Status Command Sequence	90
4.9.7	Server Session Forward Command Sequence	91
4.9.7.1	Client Initiates Session Set-Up	92
4.9.7.2	Network Rejects Forward	93
4.9.8	Server Session Transfer Command Sequence	93
4.9.8.1	Server A Initiates Session Transfer	94
4.9.8.2	Network Rejects Transfer Request	95
4.9.8.3	Server B Rejects the Transfer Request	95
4.9.8.4	Server B Unable to Allocate Resources for Transfer	96
4.9.8.5	Client Rejects Transfer	96
4.9.9	Transferred Session Release	96
4.9.9.1	SRM is Selecting sessionIds	96
4.9.9.2	Server is Selecting sessionId	96
4.10	Network Initiated Command Sequences	97
4.10.1	Network Initiated Session Release Command Sequence	98
4.10.1.1	Network Initiates Session Release	98
4.10.2	Network Initiated Continuous Feed Session Release Command Sequence	98
4.10.2.1	Network Initiates Continuous Feed Session Release	99
4.10.3	Network Initiated Client Status Command Sequence	100
4.10.3.1	Network Initiates Client Status command sequence	100
4.10.4	Network Initiated Server Status Command Sequence	101
4.10.4.1	Network Initiates Server Status command sequence	101
4.11	Reset Procedures	101
4.11.1	Client Initiated Reset Command Sequence	102
4.11.1.1	Client Initiates Reset command sequence	102
4.11.2	Server Initiated Reset Command Sequence	102
4.11.2.1	Server Initiates Reset command sequence	103
4.11.3	Network Initiated Reset Command Sequence	103
4.11.3.1	Network Initiates Reset command sequence	103

5. USER-TO-USER INTERFACES.....	105
5.1 Introduction.....	105
5.1.1 Contents.....	105
5.1.2 Intended Usage.....	105
5.2 The User-to-User System Environment.....	107
5.2.1 U-U System Hardware User Entities.....	107
5.2.2 U-U System Logical Entities.....	107
5.2.3 Application and Service Interfaces.....	109
5.2.4 Categorization of Client Library Interface Sets.....	110
5.2.4.1 Consumer Client.....	110
5.2.4.2 Producer Client.....	111
5.2.4.3 Client Library Profiles.....	111
5.2.5 Core Interfaces.....	112
5.2.5.1 Core Client Application Portability Library.....	113
5.2.5.2 Core Client Service Inter-operability Library.....	115
5.2.6 Extended Interfaces.....	116
5.2.6.1 Extended Client Application Portability Library.....	117
5.2.6.2 Extended Client Service-interoperability Library.....	118
5.3 Overview of the Interface Definition Language(IDL).....	118
5.3.1 Operations.....	120
5.3.2 Attributes.....	121
5.3.3 Language Mapping.....	121
5.3.4 Encoding.....	121
5.3.5 Typographical Conventions.....	122
5.3.6 Syntactical Conventions.....	122
5.4 Common Definitions.....	122
5.4.1 Basic Types.....	122
5.4.2 Entity Identification.....	123
5.4.3 Interface Identification.....	124
5.4.4 Access Roles for Operations.....	126
5.4.4.1 Syntax for Access Control.....	126
5.4.5 Exceptions.....	127
5.4.6 Stream and Event Synchronization.....	130
5.5 Application Portability Interfaces(API).....	131
5.5.1 Core Interfaces.....	131
5.5.1.1 Base.....	132
5.5.1.1.1 Summary of Base Primitives.....	132
5.5.1.1.2 DSM Base close.....	133
5.5.1.1.3 DSM Base destroy.....	133
5.5.1.2 Access.....	133
5.5.1.2.1 Setting Permissions.....	134
5.5.1.2.2 Access Definitions.....	135
5.5.1.3 Stream.....	136
5.5.1.3.1 Stream Definitions, Exceptions.....	137
5.5.1.3.2 Normal Play Time Temporal Positioning.....	137
5.5.1.3.2.1 Application NPT Values.....	138
5.5.1.3.3 Summary of Stream Primitives.....	138
5.5.1.3.4 Stream State Machine.....	139
5.5.1.3.4.1 State Machine.....	139
5.5.1.3.4.2 Basic State Machine.....	141
5.5.1.3.4.3 Complete state machine.....	142
5.5.1.3.5 DSM Stream pause.....	143
5.5.1.3.6 DSM Stream resume.....	144
5.5.1.3.7 DSM Stream status.....	145
5.5.1.3.8 DSM Stream reset.....	146
5.5.1.3.9 DSM Stream jump.....	146

5.5.1.3.10	DSM Stream play	147
5.5.1.4	File.....	148
5.5.1.4.1	File Definitions, Exceptions	148
5.5.1.4.2	Summary of File Primitives	149
5.5.1.4.3	DSM File read	149
5.5.1.4.4	DSM File write	150
5.5.1.5	Directory.....	151
5.5.1.5.1	Directory Definitions, Exceptions	152
5.5.1.5.2	Summary of Directory Primitives	154
5.5.1.5.3	DSM Directory list	155
5.5.1.5.4	DSM Directory resolve.....	156
5.5.1.5.5	DSM Directory bind.....	156
5.5.1.5.6	DSM Directory bind_context	157
5.5.1.5.7	rebind.....	158
5.5.1.5.8	DSM Directory rebind_context	158
5.5.1.5.9	DSM Directory unbind	159
5.5.1.5.10	DSM Directory new_context.....	160
5.5.1.5.11	DSM Directory bind_new_context.....	160
5.5.1.5.12	DSM Directory destroy	161
5.5.1.5.13	DSM Directory open	161
5.5.1.5.14	DSM Directory close.....	162
5.5.1.5.15	DSM Directory get	163
5.5.1.5.16	DSM Directory put.....	164
5.5.1.6	Session.....	165
5.5.1.6.1	Service Transfer	165
5.5.1.6.2	Summary of Session Primitives	166
5.5.1.6.3	DSM Session attach.....	166
5.5.1.6.4	DSM Session detach.....	167
5.5.1.7	ServiceGateway	168
5.5.1.7.1	Summary of ServiceGateway Primitives	168
5.5.1.8	First.....	168
5.5.1.8.1	Summary of First Primitives.....	168
5.5.1.8.2	DSM First root	169
5.5.1.8.3	DSM First service.....	169
5.5.2	Extended Interfaces	169
5.5.2.1	Download	171
5.5.2.1.1	Download Definitions, Exceptions	171
5.5.2.1.2	Summary of Download Primitives.....	171
5.5.2.1.3	DSM Download info	171
5.5.2.1.4	DSM Download alloc.....	172
5.5.2.1.5	DSM Download start.....	172
5.5.2.1.6	DSM Download cancel.....	173
5.5.2.2	Event.....	173
5.5.2.2.1	Event Definitions, Exceptions	174
5.5.2.2.2	Summary of Event Primitives.....	174
5.5.2.2.3	DSM Event subscribe	174
5.5.2.2.4	DSM Event unsubscribe	175
5.5.2.2.5	DSM Event notify.....	176
5.5.2.3	Composite.....	177
5.5.2.3.1	Summary of Composite Primitives	177
5.5.2.3.2	DSM Composite list_subs	177
5.5.2.3.3	DSM Composite bind_subs	178
5.5.2.3.4	DSM Composite unbind_subs	179
5.5.2.4	View	179
5.5.2.4.1	Non-Database View.....	180
5.5.2.4.2	Database View.....	180
5.5.2.4.3	View Procedures.....	180

5.5.2.4.4	Definition: View Style Attribute.....	181
5.5.2.4.5	View Definitions: Statement, Result.....	182
5.5.2.4.6	Summary of View Primitives.....	182
5.5.2.4.7	DSM View query.....	183
5.5.2.4.8	DSM View read.....	184
5.5.2.4.9	DSM View execute.....	185
5.5.2.5	State.....	185
5.5.2.5.1	Summary of State Primitives	185
5.5.2.5.2	DSM State suspend.....	186
5.5.2.5.3	DSM State resume.....	187
5.5.2.6	Interfaces	187
5.5.2.6.1	TCKind Constants	188
5.5.2.6.2	Exception TCKind Constants	189
5.5.2.6.3	Interfaces Definitions	190
5.5.2.6.4	Summary of Interfaces Primitives.....	190
5.5.2.6.5	DSM Interfaces show	190
5.5.2.6.6	DSM Interfaces define.....	192
5.5.2.6.7	DSM Interfaces check	193
5.5.2.6.8	DSM Interfaces undefine.....	194
5.5.2.7	Security.....	194
5.5.2.7.1	DSM Security authenticate	194
5.5.2.8	Config.....	195
5.5.2.8.1	Config Definitions	197
5.5.2.8.2	Summary of Config Primitives	197
5.5.2.8.3	DSM Config inquire	197
5.5.2.8.4	DSM Config wait.....	197
5.5.2.9	LifeCycle	198
5.5.2.9.1	DSM LifeCycle create	198
5.5.2.10	Kind.....	199
5.5.2.10.1	Summary of Kind Primitives	199
5.5.2.10.2	DSM_Kind_has_a	199
5.5.2.10.3	DSM_Kind_is_a.....	200
5.5.3	C Language Mappings.....	201
5.5.3.1	Scoped Identifiers.....	201
5.5.3.2	C Mapping for Operations.....	201
5.5.3.2.1	C Mapping for Basic Data Types	202
5.5.3.2.2	Constants	202
5.5.3.2.3	Struct Types.....	202
5.5.3.2.4	Sequence Types.....	202
5.5.3.2.5	Strings.....	203
5.5.3.2.6	Any	203
5.5.3.2.7	cv.....	203
5.5.3.2.8	Object.....	203
5.5.3.3	API Definitions.....	204
5.5.3.3.1	C Mapping for the Synchronous Interface.....	204
5.5.3.3.1.1	Base	204
5.5.3.3.1.2	Access.....	204
5.5.3.3.1.3	Stream.....	205
5.5.3.3.1.4	File.....	206
5.5.3.3.1.5	Directory.....	206
5.5.3.3.1.6	Session.....	207
5.5.3.3.1.7	First	207
5.5.3.3.1.8	Event	208
5.5.3.3.1.9	Download	208
5.5.3.3.1.10	Composite.....	208
5.5.3.3.1.11	View	209
5.5.3.3.1.12	State.....	209

5.5.3.3.1.13	Interfaces	210
5.5.3.3.1.14	Security.....	210
5.5.3.3.1.15	LifeCycle	210
5.5.3.3.1.16	Kind.....	210
5.5.3.3.2	C Mapping for the Synchronous Deferred Interface.....	211
5.5.3.3.2.1	Config.....	211
5.5.3.3.2.2	How to Convert Synchronous to Synchronous Deferred	211
5.6	Service Interoperability Interfaces(SII)	211
5.6.1	ConnBinder and Resource to Connection Association	212
5.6.1.1	Selector.....	214
5.6.2	Remote Procedure Call.....	214
5.6.3	The Object Reference	214
5.6.3.1	Min Protocol Profile	215
5.6.3.2	Child Protocol Profile.....	216
5.6.3.3	Options Protocol Profile	216
5.6.3.4	Lite Protocol Profiles.....	217
5.6.3.5	BIOP Protocol Profile	217
5.6.3.6	ONC Protocol Profile	218
5.6.4	ServiceContextList	218
5.6.4.1	ServiceContext	219
5.6.5	Core Interfaces	220
5.6.5.1	Base	220
5.6.5.2	Access.....	220
5.6.5.3	Stream.....	222
5.6.5.3.1	Transport and Application Level NPT	224
5.6.5.3.2	Consistent Quantization Rules.....	224
5.6.5.4	File.....	224
5.6.5.5	BindingIterator	225
5.6.5.6	NamingContext.....	226
5.6.5.7	Directory.....	227
5.6.6	Extended Interfaces	229
5.6.6.1	SessionUU	229
5.6.6.1.1	Partial Path	230
5.6.6.2	ServiceGatewayUU	230
5.6.6.2.1	Summary of ServiceGatewayUU Primitives.....	230
5.6.6.3	SessionSI	231
5.6.6.4	ServiceGatewaySI	231
5.6.6.4.1	Summary of ServiceGatewaySI Primitives	232
5.6.6.5	DownloadSI.....	232
5.6.6.6	Event.....	235
5.6.6.7	Composite.....	236
5.6.6.8	View	238
5.6.6.9	State.....	240
5.6.6.10	Interfaces	241
5.7	Application Boot Process	241
5.7.1	Session attach() Pre-conditions	242
5.7.2	Session attach() Procedure	243
5.7.2.1	Resolving Path-specific Parameters.....	243
5.7.2.1.1	Post-condition.....	244
5.7.2.2	Establishing the U-N Session	244
5.7.2.2.1	ClientSessionSetupRequest	244
5.7.2.2.2	ClientSessionSetupConfirm.....	245
5.7.2.2.3	Session Establishment Post-conditions	246
5.7.2.3	Download	246
5.7.3	Session Tear-down	248
5.7.4	Session Transfer Implications.....	248

6. USER COMPATIBILITY	249
6.1 Compatibility Descriptors.....	249
6.1.1 IEEE OUI Specifier.....	251
7. USER-TO-NETWORK DOWNLOAD	252
7.1 Overview	252
7.1.1 Download Network Models.....	253
7.1.2 Preconditions and Assumptions.....	254
7.2 Download Message Set	255
7.2.1 Download Control Message Format.....	255
7.2.2 Download Data Message Format.....	255
7.2.2.1 DSM-CC Download Data Header	255
7.3 Message Descriptions.....	256
7.3.1 DownloadInfoRequest	257
7.3.2 DownloadInfoResponse and DownloadInfoIndication.....	257
7.3.3 DownloadDataBlock	259
7.3.4 DownloadDataRequest	259
7.3.5 DownloadCancel	260
7.3.6 DownloadServerInitiate.....	263
7.4 Message Sequence for Flow-Controlled Download Scenario.....	263
7.4.1 Getting Download Protocol Parameters	264
7.4.2 Starting Download.....	265
7.4.3 Acknowledgments	265
7.4.4 Timers and Re-transmission	266
7.4.5 Abort	267
7.4.6 Flow-Controlled Scenario over Reliable Transport.....	267
7.5 Message Sequence for Data Carousel Scenario.....	267
7.5.1 Getting Data Carousel Parameters.....	267
7.5.2 Starting Acquisition and Module Re-Assembly.....	268
7.5.2.1 Pseudo-Code Example of Module Re-assembly.....	268
7.5.3 Timers.....	269
7.5.4 Module Coherency	270
7.5.5 Data Delivery Rate	270
7.6 Message Sequence for Non-Flow-Controlled Download Scenario	270
7.6.1 Getting Download Protocol Parameters	271
7.6.2 Image Assembly and Coherency.....	271
7.6.3 Timers.....	271
7.7 Protocol State Machines for flow-controlled download scenario	271
7.7.1 State Variables common to Client and Download Server.....	272
7.7.1.1 Service Type: reliableService, unreliableService	272
7.7.1.2 Download configured bufferSize: bufferSize	272
7.7.1.3 Download configured maximumBlockSize: blockSize	272
7.7.1.4 Download Identifier: Did.....	272
7.7.1.5 Download negotiated blockSize: Did.blockSize.....	272
7.7.1.6 Download negotiated windowSize: Did.windowSize	272
7.7.1.7 Download negotiated Acknowledgment Period: Did.ackPeriod.....	272
7.7.1.8 Download negotiated Window Timer: Did.tWindow	272
7.7.1.9 Download negotiated Scenario Timer: Did.tScenario	272
7.7.1.10 Download negotiated compatibilities: Did.compatibilities	272
7.7.1.11 Download Number of Modules: Did.numModules	272
7.7.1.12 Download Module Identifier: Did.moduleId	272
7.7.1.13 Download Module Version: Did.moduleId.version.....	273
7.7.1.14 Download Module Size: Did.moduleId.moduleSize	273
7.7.1.15 Download Expired downloadId Holding timer: Did.tHold	273
7.7.2 Client-only State Variables.....	273
7.7.2.1 Download Lower Receive Window Edge: Did.NmoduleId, Did.NblockNum	273

7.7.2.2	Number received blocks: Did.Nblock	273
7.7.2.3	Acknowledgment threshold: Did.AckThreshold.....	273
7.7.3	Server-only State Variables	273
7.7.3.1	Lower Transmit Window Edge: Did.LmoduleId, Did.LblockNum	273
7.7.3.2	Upper Transmit Window Edge: Did.UmoduleId, Did.UblockNum	273
7.7.3.3	Data Sending Rate Timer: Did.tSend	273
7.7.4	Client Conditions.....	273
7.7.4.1	Invalid ServerId.....	273
7.7.4.2	Number of re-transmission exceeded.....	274
7.7.4.3	Unacceptable blockSize.....	274
7.7.4.4	Unacceptable WindowSize.....	274
7.7.4.5	Unacceptable Acknowledgment Period	274
7.7.4.6	Unacceptable Window Timer	274
7.7.4.7	Unacceptable Scenario Timer.....	274
7.7.4.8	Unacceptable Compatibilities.....	274
7.7.4.9	Unacceptable Module Table.....	274
7.7.4.10	Acknowledgment period full	274
7.7.4.11	Download complete.....	274
7.7.5	Download Server Conditions.....	274
7.7.5.1	Unacceptable maximumBlockSize	274
7.7.5.2	Unacceptable bufferSize.....	275
7.7.5.3	Unacceptable Compatibilities	275
7.7.6	Client Procedures	275
7.7.6.1	Initial Setup of State Variables	275
7.7.6.2	Sending DownloadDataRequest Messages	275
7.7.6.3	Sending DownloadCancel Messages	275
7.7.6.4	Increment Lower Receive Window Edge	275
7.7.6.5	Increment block counter	276
7.7.6.6	Transition to DCExpire State	276
7.7.7	Download Server Procedures	276
7.7.7.1	Initial Setup of State Variables	276
7.7.7.2	Increment Lower Transmit Window Edge.....	277
7.7.7.3	Set Upper Transmit Window Edge.....	277
7.7.7.4	Sending DownloadDataBlock Messages	277
7.7.7.5	Sending DownloadCancel Messages	277
7.7.7.6	Transition to DSExpire State.....	277
7.7.8	State Machine SDL.....	277
7.8	Partial Protocol State Machines for non-flow-controlled download scenario	277
8.	STREAM DESCRIPTORS.....	279
8.1	Normal Play Time	279
8.1.1	NPT Reference Descriptor	279
8.1.2	Reconstruction of NPT	280
8.1.3	NPT Conversion to Seconds and Microseconds.....	281
8.1.4	NPT Uncertainty.....	281
8.1.4.1	Frequency of NPT Reference Descriptor.....	281
8.1.5	NPT Endpoint Descriptor.....	282
8.2	Stream Mode Descriptor	282
8.3	Stream Event Descriptor.....	283
9.	TRANSPORT	284
9.1	DSM-CC Requirements on Lower-Level Network Transport Protocol.....	284
9.1.1	U-N Message Categories	284
9.1.2	U-U Interface Categories.....	284
9.2	Encapsulation within MPEG-2 Transport Streams	285
9.2.1	Role of MPEG-2 Transport Stream in the Protocol Stack.....	285
9.2.2	DSM-CC Sections	285

9.2.2.1	Semantic definition of fields in DSMCC_section.....	286
9.2.3	DSM-CC Stream Types.....	288
9.2.4	DSM-CC Multi-protocol Encapsulation.....	288
9.2.5	U-N Message Categories.....	289
9.2.6	U-U Service Inter-operability Interface using Remote Procedure Call	289
9.2.7	DSM-CC Stream Descriptors	289
9.2.7.1	Semantic definition of fields in DSM-CC Descriptor List.....	289
9.3	Encapsulation within MPEG-2 Program Streams.....	289
9.3.1	DSM-CC Stream Descriptors	289
9.3.1.1	Semantic definition of fields in DSM-CC_program_stream_Descriptor List.....	290
9.3.2	U-N Messages and U-U SSI.....	290
10.	U-N SWITCHED DIGITAL BROADCAST -- CHANNEL CHANGE PROTOCOL.....	291
10.1	Overview	291
10.1.1	Preconditions and Assumptions.....	291
10.1.2	General Message Format	291
10.2	Switched Digital Broadcast Channel Change Protocol Messages	291
10.2.1	Use of Private Data in SDB CCP messages.....	292
10.2.2	Use of BroadcastProgramId in SDB CCP messages	292
10.2.3	SDB CCP message definitions	292
10.2.3.1	SDBProgramSelectRequest message definition	293
10.2.3.2	SDBProgramSelectConfirm message definition.....	293
10.2.3.3	SDBProgramSelectIndication message definition.....	294
10.2.3.4	SDBProgramSelectResponse message definition.....	294
10.3	SDB Channel Change Protocol Command Scenarios.....	294
10.3.1	Client Initiated Program Select Command Sequence	294
10.3.2	SDB Server Initiated Program Select Command Sequence.....	296
10.4	SDB Reason and Response Codes.....	297
10.4.1	SDB Reason Codes	297
10.4.2	SDB Response Codes	298
10.5	SDB State Machine	298
10.5.1	SDB State Machine for the Client Side	298
10.5.2	State machine for the SDB Server Side.....	300
11.	U-U OBJECT CAROUSEL.....	303
11.1	Introduction	303
11.2	Concepts.....	304
11.2.1	Supported U-U Objects and Interfaces.....	304
11.2.2	Service Domain and Service Gateway.....	304
11.2.3	Object References.....	305
11.2.4	Transport of BIOP Messages.....	305
11.2.5	Module Delivery Parameters	306
11.2.6	Taps.....	306
11.3	Broadcast Inter ORB Protocol.....	307
11.3.1	Inter-operable Object Reference (IOR)	307
11.3.1.1	Profile Body Definition	307
11.3.1.1.1	Object Location Component.....	307
11.3.1.1.2	ConnBinder Component.....	307
11.3.2	Message Set Definition.....	308
11.3.2.1	Generic Object Message Format	308
11.3.2.2	Directory Message Format	310
11.3.2.3	File Message Format	311
11.3.2.4	Stream Message Format	311
11.3.2.5	Service Gateway Message Format.....	313
11.3.3	Transport Definitions.....	313
11.3.3.1	BIOP Messages	313
11.3.3.2	Module Delivery Parameters	313

11.3.3.3	IOR of Service Gateway	314
11.4	MPEG-2 Descriptors	315
11.4.1	Carousel identifier descriptor	316
11.4.2	Association tag descriptor	316
11.4.3	Deferred association tags descriptor	318
12.	USER-TO-NETWORK PASS-THRU MESSAGES.....	319
12.1	Overview and the General Message Format	319
12.2	Pass-Thru Messages	319
12.2.1	Use of PassThruData() structure in Pass-Thru messages	320
12.2.2	Pass-Thru message definitions.....	321
12.2.2.1	PassThruRequest	321
12.2.2.2	PassThruIndication.....	321
12.2.2.3	PassThruReceiptRequest	321
12.2.2.4	PassThruReceiptConfirm.....	322
12.2.2.5	PassThruReceiptIndication.....	322
12.2.2.6	PassThruReceiptResponse.....	323
12.3	User-to-Network Pass-Thru Message Field Data Types.....	323
12.4	Pass-Thru Message Scenario	324
12.4.1	Pass-Thru Message scenario.....	324
12.4.1.1	The Sending User sends a PassThruRequest	324
12.5	Pass-Thru Receipt Message Scenario	324
12.5.1	Pass-Thru Receipt Message scenario.....	325
12.5.1.1	The Sending User sends a PassThruReceiptRequest	325
12.6	Pass-Thru Response Codes.....	326
12.7	Pass-Thru Type Codes.....	326
12.8	State Machine.....	326
ANNEX A (NORMATIVE)	USER-NETWORK PROTOCOL STATE MACHINES.....	327
A.1	Introduction	327
A.2	U-N Session.....	327
A.3	U-N Download – Flow Controlled Scenario	364
A.4	U-N Switched Digital Broadcast Channel Change Protocol.....	377
A.5	U-N Pass-Thru.....	390
ANNEX B (INFORMATIVE)	APPLICATION EXAMPLES.....	399
B.1	Introduction	399
B.2	Video Stream Play.....	399
B.3	Building a Directory Hierarchy	401
B.4	Movie Information Database	402
B.5	View as a Personalized Directory.....	408
ANNEX C (INFORMATIVE)	ONC RPC XDR MAPPINGS.....	410
C.1	Overview	410
C.2	General RPC Message Formats	410
C.3	CORBA IDL C to XDR Mapping	412
C.3.1	Mapping for Integer Data Types	412
C.3.2	Mapping for void.....	412
C.3.3	Mapping for Constants	413
C.3.4	Mapping for octet	413
C.3.5	Mapping for Fixed-length Constructed Types	413
C.3.5.1	Mapping for struct	413
C.3.6	Mapping for sequences.....	413
C.3.6.1	Example: Mapping for opaque	413
C.3.6.2	Example: Mapping for PathSpec	414
C.3.7	Mapping for string.....	415
C.4	DSM-CC ONC Protocol Profile for the Interoperable Object Reference.....	415

C.5	Exceptions	416
C.6	Request and Reply Header Structures	417
C.7	DSM-CC RPC Program Numbers	418
C.7.1	RPC Program Dispatch Tables Mapping	418
ANNEX D (INFORMATIVE) USING DSM-CC U-N SESSION MESSAGES WITH ATM.....		421
D.1	Methods of using DSM-CC over ATM	421
D.1.1	Session Method	421
D.1.2	Network Method with AddResource messages between the Server and the SRM	421
D.1.3	Network Method with NO AddResource messages between the Server and the SRM.....	421
D.1.4	Integrated Method	422
D.2	Association of DSM-CC connection resources to ATM SVCs	423
D.2.1	DSM-CC resourceId Mapping into Q.2931.....	423
D.3	Session Method Command Sequences	424
D.3.1	Session Set-Up	424
D.3.1.1	Client Session Set-Up	425
D.3.2	Add Resource Request	428
D.3.2.1	Add Resource Request by the Server	429
D.3.3	Resource Deletion	430
D.3.3.1	Resource Deletion by the Server	431
D.3.4	Session Tear-Down	433
D.3.4.1	Session Tear-Down by Server	434
D.3.4.2	Session Tear-Down by Client.....	436
D.4	Network Method with DSM-CC AddResource messages between the Server and SRM	437
D.4.1	Session Set-Up	437
D.4.1.1	Client Session Set-Up, Server ATM Connection Set-Up	437
D.4.2	Add Resource Request	440
D.4.2.1	Add Resource Request by Server and ATM SVC Connection Set-Up by Server	440
D.4.3	Resource Deletion	442
D.4.3.1	Resource Deletion Request by Server and ATM SVC Connection Release by Server....	442
D.4.4	Session Tear-Down	443
D.4.4.1	Session Tear-Down Request by Server and ATM SVC Connection Release by Client ..	443
D.4.4.2	Session Tear-Down Request by Client and ATM SVC Connection Release by Server ..	444
D.4.4.3	Session Tear-Down Request by Server and ATM SVC Connection Release by Server..	445
D.5	Network Method with NO DSM-CC AddResource messages between the Server and SRM	446
D.5.1	Session Set-Up	446
D.5.1.1	Client Session Set-Up	447
D.5.2	Add Resource Request	447
D.5.2.1	Add Resource Request by the Server	447
D.5.3	Connection Clearing	449
D.5.3.1	Connection Clearing by the Server	449
D.5.3.2	Connection Clearing by the Client.....	451
D.5.4	Session Tear-Down	451
D.5.4.1	Session Tear-Down by Server	451
D.5.4.2	Session Tear-Down by Client.....	452
D.6	Integrated Method Command Sequences	453
D.6.1	Session Set-Up	454
D.6.1.1	Client Session Set-Up	454
D.6.1.2	Server Session Set-Up	455
D.6.2	Integrated Method for Adding Resources.....	455
D.6.3	Connection Clearing	456
D.6.4	Session Tear-Down	456
D.6.4.1	Server Session Tear-Down	457
D.6.4.2	Client Session Tear Down	457
D.7	References	457
ANNEX E (INFORMATIVE) UNO INTER-OPERABLE RPC PROTOCOL STACK.....		459

E.1	Abstract	459
E.2	Motivation	459
E.3	Solution Space	459
E.4	Inter-operation Framework	460
E.5	Protocol Selection	461
E.6	Common Data Representation	461
E.6.1	Encapsulation	462
E.6.2	Alignment	462
E.6.3	Primitive Data Types	462
E.6.4	Compound Types	463
E.6.5	TypeCode	463
E.7	UNO Session Protocol	464
E.7.1	Message Set	464
E.7.1.1	Request Message	464
E.7.1.2	Reply	465
E.7.1.3	CancelRequest	466
E.7.1.4	LocateRequest	466
E.7.1.5	LocateReply	466
E.7.1.6	CloseConnection	466
E.7.1.7	MessageError	466
E.7.2	Session Semantics	466
E.8	Transport and Network Semantics	467
ANNEX F (INFORMATIVE) USE OF U-U OBJECT CAROUSEL		468
F.1	Introduction	468
F.2	Purpose of U-U Object Carousels	468
F.3	IDL structures	468
F.3.1	Inter-operable object Reference	468
F.3.2	Generic object Message	470
F.3.3	Directory Message	470
F.4	Support for New Object Representations	471
F.5	How to resolve an object from its IOR	472
F.6	Service Gateway and Download support	474
F.7	U-U Object Carousels on top of MPEG-2 TS Broadcast Networks	475
ANNEX G (INFORMATIVE) SHARED RESOURCES AND THE ASSOCIATION TAG		477
G.1	Introduction	477
G.2	Use of the Association Tag	477
G.3	Use of the SharedResource Descriptor	478
G.4	Use of the SharedRequestId Descriptor	478
G.5	Common Examples of Use	479
G.5.1	Download Phase, Multiple ATM SVCs	479
G.5.1.1	End-to-End ATM	479
G.5.1.2	Non-ATM HFC Client View	480
G.5.2	Video Play Phase, Multiple ATM SVCs	481
G.5.2.1	End-to-End ATM	481
G.5.2.2	Non-ATM HFC Client View	482
G.5.3	Single Asymmetric ATM SVC	483
G.5.3.1	End-to-End ATM	483
G.5.3.2	Non-ATM HFC Client View	484
G.5.4	Single Asymmetric ATM PVC	486
G.5.5	Download Phase, Multiple ATM PVCs	486
G.5.6	Video Play Phase, Multiple ATM PVCs	486
G.5.7	Use of sharedResourceRequest Descriptors	486
ANNEX H (INFORMATIVE) SWITCHED DIGITAL BROADCAST SERVICE		487
H.1	Introduction	487

H.2	Switched Digital Broadcast Service	487
II.3	Functional Flows	488
H.3.1	Broadcast Program Configuration	488
H.3.2	Client Service Profile Transfer to the SDB Server	489
H.3.3	Broadcast Program Guide Transfer to Client	490
H.3.4	Switched Digital Broadcast Service Session Establishment	490
H.3.5	Client Initiated Channel Changes	492
H.3.6	Network Initiated Channel Changes	493
H.3.7	Digital Broadcast Session Release.....	495
ANNEX I (INFORMATIVE) EXAMPLE U-N LIFE CYCLE WALK THROUGH.....		497
I.1	Introduction	497
I.2	General Flow	497
I.3	U-N-Configuration	498
I.3.1	Pre Conditions	498
I.3.2	Procedure.....	498
I.3.3	Post Conditions	498
I.4	U-N Session Setup.....	499
I.4.1	Pre Conditions	499
I.4.2	Procedure.....	499
I.4.3	Post Conditions	502
I.5	U-N Download	503
I.5.1	Pre Conditions	503
I.5.2	Procedure.....	504
I.5.3	Post Conditions	504
ANNEX J (INFORMATIVE) EXAMPLE OF AN OSI NSAP ADDRESS FORMAT		505
J.1	Purpose.....	505
J.2	Introduction	505
J.3	E.164 NSAP	505
ANNEX K (INFORMATIVE) STREAM PLAYLIST.....		507
K.1	Overview	507
K.2	DSM QStream next	509
ANNEX L (INFORMATIVE) SERVICE TRANSFER MESSAGE FLOWS		510
L.1	Introduction	510
L.1.1	Use of service transfer in the normal course of service	510
L.1.2	Use of Service Transfer in emergency cases	511
L.2	Basic application level Service Transfer	511
L.2.1	Service Transfer: sourceServer to destinationServer with sourceServer Session Release ...	511
L.2.2	Service Transfer: sourceServer to destinationServer, Service maintained on sourceServer	512
L.3	Enhanced application level Service Transfer.....	513
L.3.1	Release the Session with the sourceServer	513
L.3.2	Maintain minimum resources with the sourceServer	514
L.3.3	Maintain the service with the sourceServer	515
L.3.4	Fall back to Server A after Session release with the sourceServer	515
L.3.5	Resumption of the full context on Server A after reduced Session.....	515
L.3.6	Emergency Service Transfer.....	516
ANNEX M (INFORMATIVE) T.120 INTER-WORKING.....		519
M.1	Introduction	519
M.2	Reference Model for side-by-side integrated DSM-CC/T.120	519
M.3	Features, Functions and Services of the DSM-CC and the T.120 specifications.....	521
M.3.1	Features, Functions and Services of DSM-CC	521
M.3.2	Features, Functions and Services of T.120.....	521

M.3.3	Inter-working of DSM-CC and T.120 Features, Functions and Services	521
M.4	DSM-CC and T.120 Components Harmonized	522
M.5	Specifics for inter-operation between DSM-CC and T.120.....	523
M.5.1	Terminal 1 creates a conference	524
M.5.2	Terminal 2 queries a conference.....	524
M.5.3	Terminal 2 joins the conference	524
M.6	T.120 service within DSM-CC.....	536
M.6.1	An Example of Extending DSM-UU to provide custom interfaces	536
ANNEX N (INFORMATIVE) THE RELATION OF DSM-CC TO MHEG-5		539
N.1	Overview	539
N.2	Name Space.....	539
N.2.1	MHEG Object References	540
N.2.2	Content References.....	540
N.3	Stream Events and Normal Play Time.....	540
N.4	Example of DSM-CC file structure for an application	541
N.5	Example of Mapping High-Level API Actions on DSM-CC U-U Primitives	542

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 13818-6 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

ISO/IEC 13818 consists of the following parts, under the general title *Information technology — Generic coding of moving pictures and associated audio information*:

- *Part 1: Systems*
- *Part 2: Video*
- *Part 3: Audio*
- *Part 4: Compliance testing*
- *Part 5: Software simulation*
- *Part 6: Extensions for DSM-CC*
- *Part 7: Advanced Audio Coding (AAC)*
- *Part 9: Extension for real time interface for systems decoders*
- *Part 10: Conformance extensions for DSM-CC*

Annex A forms an integral part of this part of ISO/IEC 13818. Annexes B to N are for information only.

0. Introduction

The Digital Storage Media Command and Control (DSM-CC) specification is an integral part of ISO/IEC 13818 (MPEG-2). It consists of a modular set of protocols that may be combined or used individually to provide a wide range of functionality which may be used to support emerging multimedia technologies.

The concepts and protocols of DSM-CC provide the general capability to browse, select, download, and control a variety of bit stream types. DSM-CC also provides a mechanism to manage network and application resources through the concept of a “session”. A Session is an associated collection of resources required to deliver a Service. Examples of resources are MPEG-2 Transport Stream packet identifiers and network bandwidth. The Session complements a “Service Domain”, which is a collection of interfaces to browse and select services, and control the delivery of bit streams.

One of the strengths of DSM-CC is in its abstraction from underlying networks; a suite of uniform interfaces are visible to the application, shielding it from the details of inter-working among heterogeneous networks – e.g., Hybrid Fiber Coax (HFC), Asynchronous Transfer Mode (ATM), Asymmetric Digital Subscriber Loop (ADSL), Internet Protocol (IP), and combinations of these technologies as part of an end-to-end multimedia system. In other words, a server may simultaneously and uniformly interact through a single network interface with clients connected to different network types, without requiring a separate network interface to each client.

The session signaling layer provides a uniform, flexible, and extensible method for managing heterogeneous resource types. In addition to the network and service types described in this specification, DSM-CC may be extended to support other networks and services through the definition of new resource types.

In DSM-CC, a bit stream is sourced by a Server and delivered to a Client. Both the Client and the Server are logical embodiments and do not imply a singular device in an actual implementation.


Application/service examples are interactive multimedia retrieval (including video-on-demand), Internet access, digital video broadcasting, data downloading, and audio/video/graphics conferencing.

0.1 Guiding Factors in the Formulation of DSM-CC

The DSM-CC specification was influenced by the following factors:

- A wide range of network topologies may be used to deliver DSM-CC.
- Resources are finite and need to be managed.
- Latencies need to be minimized to provide (interactive) services.
- DSM-CC applications need to be supported by an underlying protocol that facilitates communications between a Server-side application and a corresponding Client-side application.

0.2 DSM-CC Client-Network-Server Model

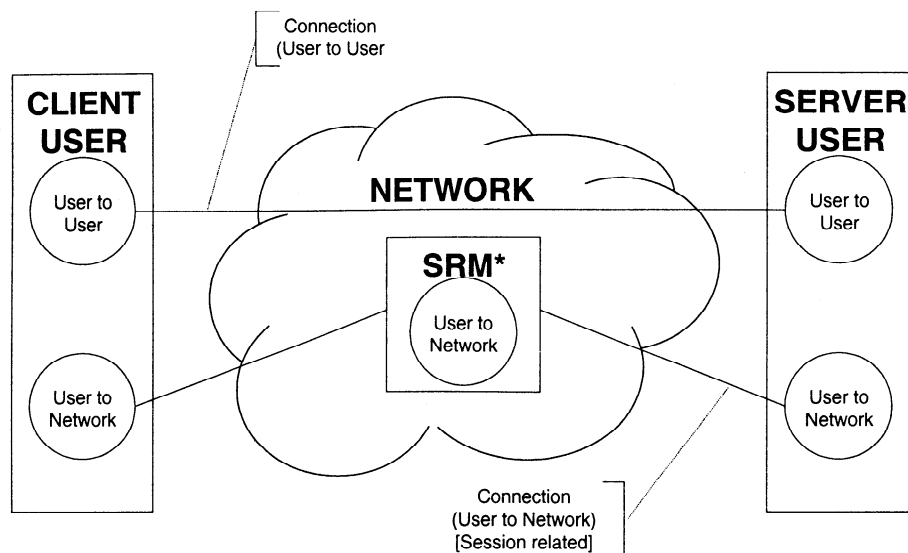

*May provide session, connection and configuration management and control.

Figure 0-1 DSM-CC basic Client-Network-Server model

Figure 0-1 depicts the basic model used in DSM-CC. A Session and Resource Manager (SRM) provides logically centralized management of the DSM-CC Sessions and Resources. DSM-CC User-to-Network (U-N) messages flow between the Client and SRM and the Server and SRM. Both the Client and the Server are called Users of DSM-CC. The U-N session protocol establishes a Session and groups all the resources required for delivering a service. The service interactions are carried between the Client and the Server participating in the Session using DSM-CC User-to-User (U-U) messages. The SRM also does U-N configuration management and control of both Clients and Servers to allow their participation in the DSM-CC environment.

DSM-CC supports network topologies which consist of multiple Clients and multiple Servers. Any Client-Server pair can communicate together by establishing a Session. Each Client can have multiple simultaneous Sessions with any specific Server or any combination of Servers. For this phase of DSM-CC, a Session is typically limited to one Client, one Server, and one SRM. The exception is the case of Continuous Feed Sessions (CFS). A CFS may be used by, e.g., a stream broadcasting application, where broadcast “feeds” are established with the network with no particular Client specified. Clients may “attach” to a CFS by setting up a Session with the network to connect to the CFS and, optionally, to establish Client-unique resources (such as a return control channel that may be needed by an interactive application which shares a downstream feed, e.g., game show voting). Alternatively, Clients may “attach” to a CFS or another broadcast “feed” by using the U-N Switched Digital Broadcast Channel Change Protocol (SDB-CCP), when no Client-unique Resources are needed by the application (such as with traditional “pay-per-view”).

0.3 Outline of the DSM-CC Specification

DSM-CC consists of a set of User-to-Network and User-to-User protocols. These protocols are described in the clauses listed below.

0.3.1 User-to-Network

- DSM-CC Message Header, clause 2
- U-N Configuration messages, clause 3
- U-N Session messages and flow diagrams for Session and Resource management, clause 4
- U-N Download messages, clause 7
- U-N Switched Digital Broadcast Channel Change Protocol, clause 10
- U-N Pass Thru messages, clause 12
- The transport of DSM-CC U-N messages using MPEG-2 Systems (ISO/IEC 13818-1), clause 9
- The transport of generic IP messages using DSM-CC Sections and MPEG-2 Systems, clause 9

0.3.2 User-to-User

- U-U Remote Procedure Call (RPC), clause 5
- U-U Session interface, clause 5
- U-U Download interface, clause 5
- U-U Object Carousel interface, clause 11
- U-U Local Object interface, clause 5
- U-U Stream Descriptors, clause 8

0.4 Supported Network Technologies

DSM-CC does not specify the underlying physical, data link, transport, or RPC layers of the overall protocol stack. However, DSM-CC does specify requirements for these layers in clause 9.

0.5 Supported Connection Types

DSM-CC supports the following connection types:

- Point-to-point
- Point-to-multi-point (broadcast)

User-to-User application and service exchanges are carried over point-to-point type connections.

The point-to-multi-point type connections are used to feed a single stream to multiple Clients. In this case, no single Client has control (e.g., for the purpose of pause, fast forward) of the received bit stream. However, in the case where the network (as opposed to the Client) does stream switching such as with Switched Digital Broadcast (SDB) applications, a means is provided for Clients to switch between streams using the SDB channel change protocol (SDB-CCP). The latter is useful for applications such as the so-called “enhanced pay-per-view” or “near video on demand”.

0.6 DSM-CC Interfaces

The DSM-CC model (Figure 0-1) consists of three Subsystems:

- Client
- Server
- Session & Resource Manager (SRM)

Each subsystem is a logical embodiment within a DSM-CC System. It does not map directly to physical equipment. The SRM represents the DSM-CC functionality within a DSM-CC network (the Network).

In order to define interfaces, a DSM-CC System Reference Model is used to subdivide the DSM-CC environment into a hierarchy of several levels (see Figure 0-2):

- System
- Subsystem
- Entity
- Sub-entity

A Subsystem may contain more than one Entity. The types of Entities are:

- Client User-to-User Entity
- Client User-to-Network Entity
- Server User-to-User Entity
- Server User-to-Network Entity
- SRM User-to-Network Entity

DSM-CC signaling is always exchanged between specific Subsystem Entities.

From the normative perspective, the System Reference Model does not show any more detail below the Entities. However, for informative reasons, the Entities have in some cases been further divided into Sub-entities. For example, the Client and Server U-N Entities include a Session Manager, Resource Manager, and a Configuration Manager. On the Server side, the U-U Entity includes a Service Gateway and an Object Access Manager.

DSM-CC recognizes that Subsystems will require other Entities which are not specified by this part of ISO/IEC 13818. Examples are a Connection Management Entity and Application Entities.

Figure 0-2 shows the different entities and sub-entities of the DSM-CC system.

To show the boundaries between Entities, Figure 0-2 is divided into four layers:

- The Application Entity layer, which is outside the scope of this part of ISO/IEC 13818
- The User-to-User Entity, which is an Application/Service Control/Management Layer
- The User-to-Network Entity, which is a Session and Resource Control/Management Layer
- The Connection Control Entity, which is (typically part of) a Transport Layer, and is outside the scope of this part of ISO/IEC 13818.

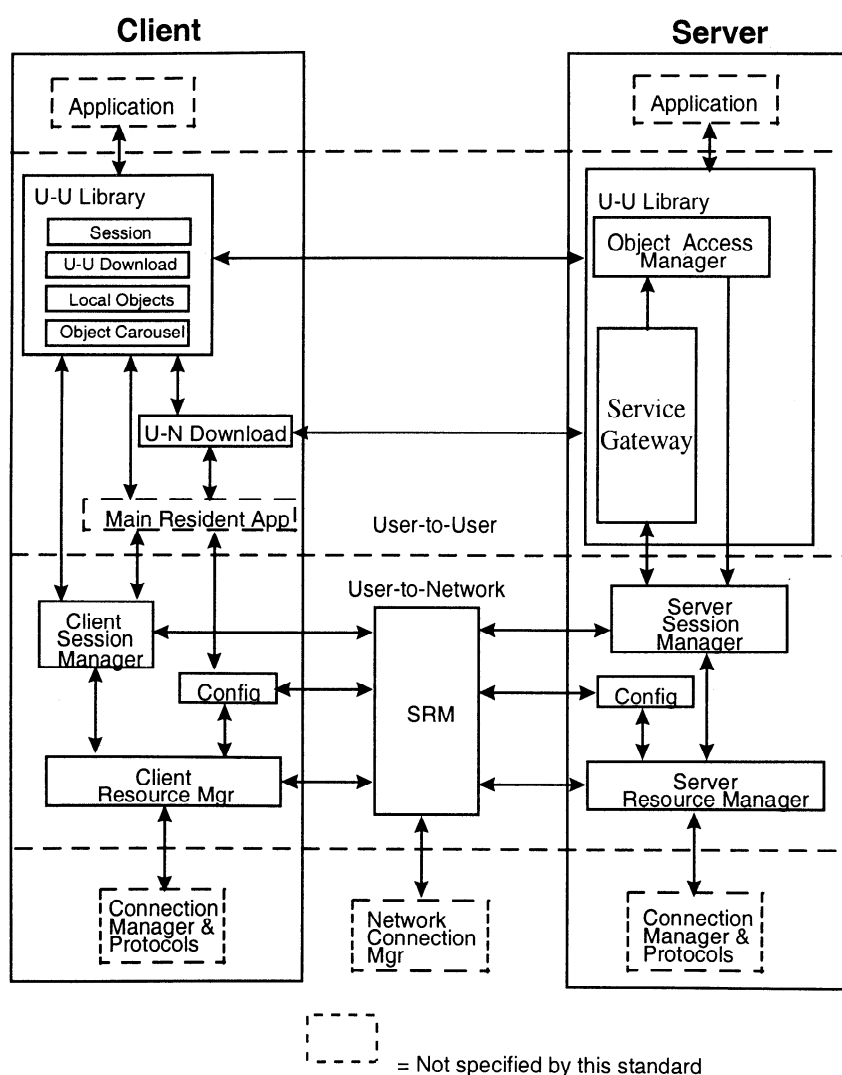


Figure 0-2 DSM-CC System Reference Model

Each of the lines with arrows in Figure 0-2 represents a logical interface. DSM-CC defines three types of interfaces:

- Inter-Entity

- Intra-Entity
- Intra-Subsystem

The Inter-Entity interfaces are between peer Entities in different Subsystems. The interfaces between the Sub-entities within a common Entity are called Intra-Entity interfaces. The interfaces between Entities within a common Subsystem are called Intra-Subsystem interfaces.

The DSM-CC System Reference Model specifies three communication paths over which DSM-CC messages are exchanged. The communication between U-U Entities are represented as the DSM-CC U-U Protocol. The communication between U-N Entities are represented as the DSM-CC U-N Protocol.

- Client U-U Entity to Server U-U Entity (U-U)
- Client U-N Entity to SRM U-N Entity (U-N)
- Server U-N Entity to SRM U-N Entity (U-N)

Table 0-1 summarizes Inter-Entity interfaces and Intra-Subsystem interfaces within the scope of DSM-CC.

Table 0-1 DSM-CC Interface Scope Summary

Peer 1	Peer 2	Protocol	Inter-Entity	Intra-Subsystem
Client U-U Library	Server Service Gateway	U-U	X	
Client U-U Library	Server Object Access	U-U	X	
Client Session Gateway	SRM	U-N	X	
Client Resource Manager	SRM	U-N	X	
Server Session Manager	SRM	U-N	X	
Server Resource Manager	SRM	U-N	X	
Client Configuration	SRM	U-N Config	X	
Server Configuration	SRM	U-N Config	X	
Server DSM Source (e.g. MPEG-2 Transport / Video / Audio)	Client DSM Consumer	(MPEG)	X ¹	
Download Server (Source)	U-N Download Client (Consumer)	Download	X ¹	
Object Carousel Server	Object Carousel Client	Object Carousel / Download	X ¹	
SDB Server	(SDB) Client	SDB-CCP	X ¹	
Client Application	Client U-U Library	U-U		X

Note 1: Interface not shown on Figure 0-2.

0.7 DSM-CC Interface Protocols

Figure 0-3 depicts DSM-CC protocols used at DSM-CC interface points. The top section of the figure contains some applications which may use DSM-CC. The middle section of the figure contains all of the DSM-CC specified protocols. The specific Transport Layers, the bottom section, are not specified by this part of ISO/IEC 13818.

Note that Figure 0-3 applies to the case where the full suite of DSM-CC protocols (except for the extended protocol groups) are employed. DSM-CC allows each protocol to be implemented without the others (see subclause 1.2 Profiles and Compliance). If the U-U Library is not used, then the implementation will not have an Application Portability Interface specified by DSM-CC.

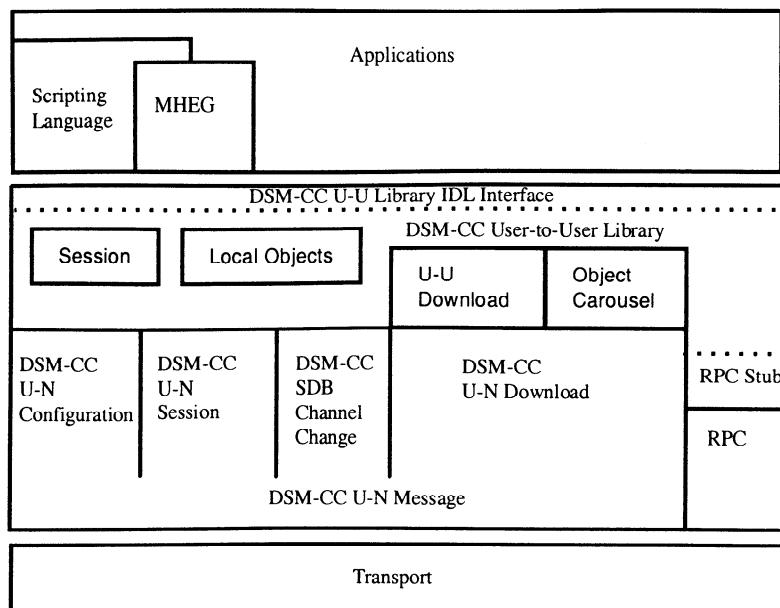


Figure 0-3 DSM-CC Interface Protocols

DSM-CC provides access to Stream and Data objects for applications (e.g., MHEG applications and scripting language applications). The primary application interface layer is the DSM-CC U-U Library Interface Definition Language (IDL), or Application Portability Interface. The U-U Library may in turn make use of the U-N Session Management, U-N Download, and U-U Object Carousel layer to establish and manage Sessions and Resources required for the management and delivery of the Stream and Data objects.

Table 0-2 lists the DSM-CC protocols. The protocols which use the DSM-CC message format are U-N Configuration, U-N Session, U-N SDB-CCP, U-N Download, and U-U Object Carousel (because it, in turn, uses U-N Download). In some cases, the use of a message passing interface is needed because the Client device may not have higher layer protocols (e.g., RPC) resident.

The U-U Library uses the services of the U-N protocols, but also adds its own on-the-wire protocol, the U-U RPC Stub Library, which are based on existing Remote Procedure Call (RPC) interfaces. The protocols which use RPC do so because it provides sophisticated object based services.

The third category is IDL, which is used in communicating within the Subsystem to applications.

Table 0-2 The DSM-CC Protocols used on the Interfaces

DSM-CC Protocols	Peer 1	Peer 2	U-N Message Format	IDL/RPC
U-N Configuration	Client / Server	SRM	x	
U-N Session	Client / Server	SRM	x	
U-N Download	Client	Download server	x	
U-N Switched Digital Broadcast Channel Change	Client	SDB server	x	
U-N Pass Thru	Client	Server	x	
U-U RPC	Client	RPC server		RPC
U-U Session	Client Application	Client U-U Library		IDL
U-U Download	Client Application	Client U-U Library		IDL
U-U Object Carousel	Object Carousel Client	Object Carousel	x	
U-U Local Objects	Client Application	U-U Library		IDL

The transport layer in Figure 0-3 may consist of any protocol which meets the transport requirements described in clause 9. Examples are, TCP or UDP over IP, AAL-5 over ATM, or DSM-CC/private_sections over MPEG-2 Transport Stream.

0.8 Communications Requirements

The DSM-CC U-N Configuration, U-N Session, U-N SDB-CCP and U-N Download messages all use the DSM-CC Message Format and are implemented using a simple message passing method; therefore, all have similar Transport Layer requirements. The U-U Object Carousel uses the U-N Download protocol and its associated transport requirements. The U-U RPC Stub Library uses RPC and its associated transport requirements.

The requirements for the underlying Transport services for all DSM-CC protocols are provided in detail in clause 9, Transport.

0.9 Methods of Specification

0.9.1 Messages

U-N messages are described in tables which list the bit or byte level assignment for all of the fields in each message. The syntactical structure of the messages are defined by Syntax Tables like the example below. Field names are shown in bold and always have an associated number of bytes indicated. All numeric values are unsigned big-endian (most significant byte first, most significant bit first) unless otherwise specified. The method of syntax description supports loops and 'procedures' using a pseudo-C syntax. In the example below, a for() loop, in normal font, indicates that the field **uuDataByte** repeats uuDataCount times. Also, the structure has been named UserData(), which now can in turn be referenced in other larger structures.

Syntax	Num. of Bytes
UserData(){	
uuDataLength	2
for(i=0;i<uuDataCount;i++) {	
uuDataByte	1
}	
privateDataLength	2
for(i=0;i<privateDataLength;i++) {	
privateDataByte	1
}	
}	

Figure 0-4 Example of U-N message syntax

The messages for U-N Configuration and U-N Session flow between Client and Network (SRM), and Server and Network (SRM). For consistency, the suffix of each of these messages use the following terminology:

Request - A message sent from a User (Client or Server) to the Network to begin a scenario.

Confirm - A message being sent from the Network to a User (Client or Server) in response to a Request message.

Indication - A message which is sent from the Network to a User.

Response - A message from a User to the Network in response to an Indication message.

Clause 9, Transport, defines the communications requirements (reliability, addressing etc.) for the delivery of these messages.

A standard programming API for the use of these messages is outside the scope of this part of ISO/IEC 13818.

0.9.2 Message Flow Diagram Scenarios

Flow diagrams have been provided to help explain the use of the DSM-CC message protocols. These diagrams show the sequence and direction of flow for the messages of a specific scenario. In these diagrams, the time axis runs vertically, with messages lower on the diagrams representing later transmission. The selected scenarios are the most typical ones and do not represent the exhaustive list of examples of scenarios. The Specification and Description Language (SDL) representations provide a more exhaustive representation, including exception cases.

0.9.3 Specification and Description Language

The SDL-language is officially defined in ITU-T recommendation Z.100. For the translation of the DSM-CC specification into SDL, SDL-88 (Z.100 blue book) is used. There are several advantages to using SDL:

- Contrary to the textual part, usage of SDL in the specification makes it unambiguous due to the fact that SDL is a formal language.
- One representation of SDL is the graphical one. This makes the language more comprehensible.
- The SDL specification can be analyzed for completeness and correctness.
- It is easy to generate executable code in order to simulate and validate the specification.
- The specification can also be used for conformance test purposes.

For simulation purposes, Message Sequence Charts (MSC), as defined in ITU-T recommendation Z.120, are used.

A model described in SDL consists of three different types of levels.

1. System level
2. Block level
3. Process level

The highest level of the SDL model is the system level. The system is surrounded by the environment represented by a rectangle in the graphical representation. On the system level, the model of the system is described in a very rough shape

divided into one or more blocks. The blocks can contain either new blocks or processes. At some block level, the content is one or several processes in each block. The process level could then describe logical parts of the system related to each other with the signals exchanged between them.

A static process is created at start-up time for the system. A dynamic process is created during runtime by another process. The number of dynamic processes which may be created is set by a constant value. A process can be stopped by the process itself at any point in time.

A process is a state machine and the only way to move from one state to another state is via a transition. One or several possible transitions can be connected to a state. A transition is always initiated by either an input signal or an enabling condition. An input signal can be generated by an output signal from an outside process, from within the same process, or by an expired timer. Here, the environment is also regarded as a process. The input signal is put in an input queue which is a common queue for the process.

When an input signal is consumed, a transition is started and the actual code defined between the state and the next state is executed. In the graphical representation, the code consists of one or several graphical symbols with some additional plain text; variables may be assigned new values in a task, questions may be answered in a decision, an output signal may be sent to another process, etc.

Figure 0-5 shows some common SDL symbols. Complete specification of SDL is outside of the scope of this specification, but may be found in ITU-T Z.100 and Z.120.

The intent is to have the message flow diagrams and prose be consistent with the SDL tables. Since the SDL is more exhaustive, if there is any form of contradiction between the prose and SDL, the SDL shall take precedence.

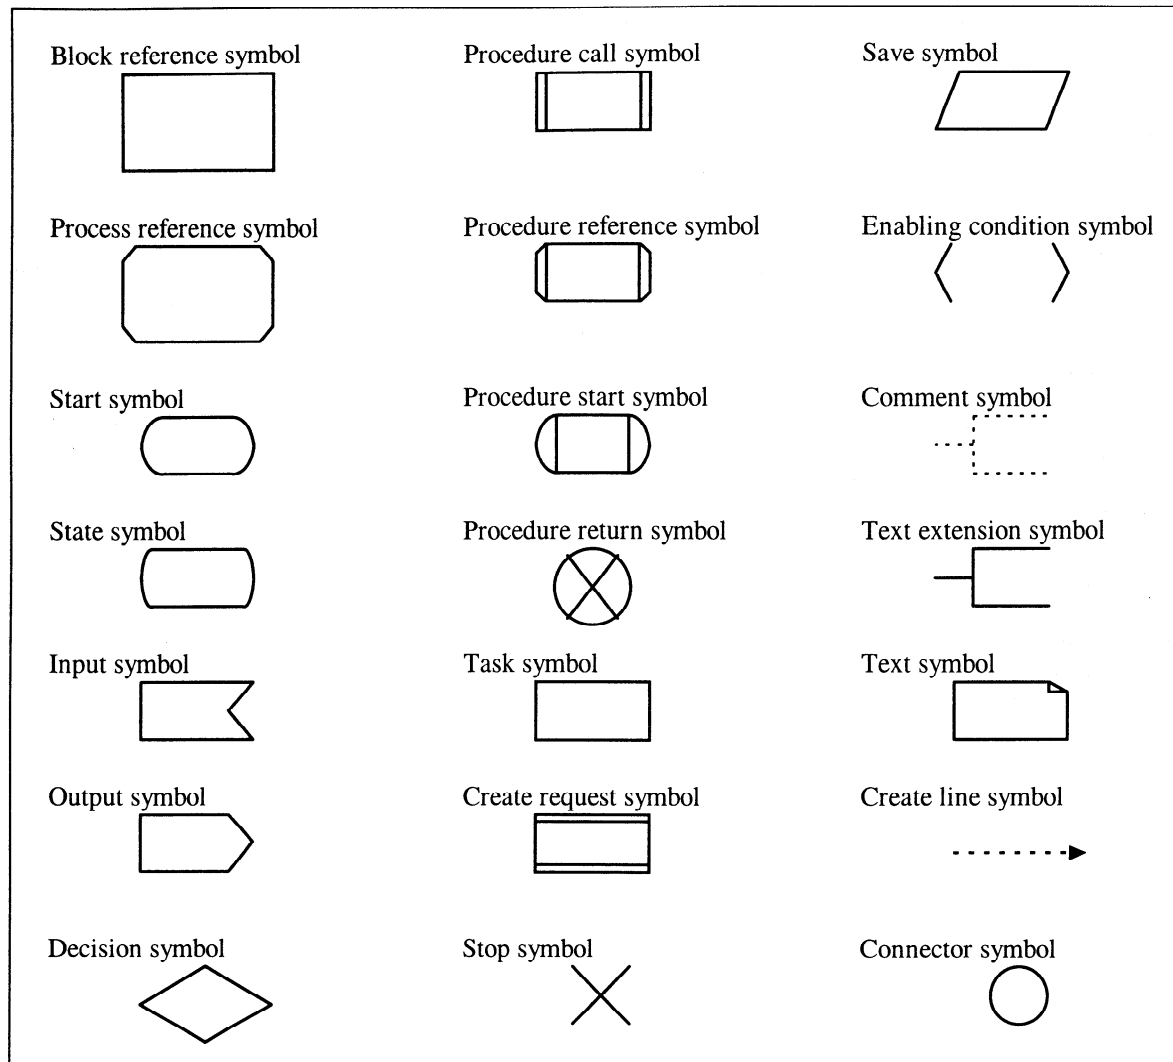


Figure 0-5 SDL Symbols

0.9.4 Interface Definition Language (IDL)

The U-U API primitives that use RPC are defined in terms of OMG Interface Definition Language (IDL), defined by ISO/IEC 14750. The IDL provides a grammar for defining the function call-like API specification for each primitive. Primitives written in the IDL are compiled by an IDL compiler to produce client and server stubs (executable code that implements packet formation, dispatch, receipt, and interpretation) and a header file used during compilation of the client and server applications.

0.9.5 Remote Procedure Call (RPC)

U-U functionality exploits a Remote Procedure Call (RPC) protocol. A RPC allows implementation of a client-server model in which applications on a client are written to call functions that are similar to those that might be used if all actions were to be executed locally. For those U-U API primitives that use the RPC, the RPC and data encoding defines the actual bits that are exchanged as primitives are executed.

The downstream reply from the Server can be delivered via encapsulation within a MPEG-2 Transport Stream. Although this part of ISO/IEC 13818 specifies how to encapsulate common protocols (e.g., IP) over MPEG-2 Transport, there is no requirement that control messages or RPC messages be delivered within MPEG-2 Transport Streams.

0.9.5.1 Independence of RPC

DSM-CC may be implemented using any RPC which utilizes primitives that are legal within the Interface Definition Language (IDL). The RPC will include a data representation choice which defines how data structures are mapped to bits: for example, Common Data Representation (CDR) or External Data Representation (XDR).

Different implementations of RPC may generate different bit patterns on a communication link for the same primitive. Communication between a client using one RPC and a server using a different RPC would require a translator (executing on either the server or client side) to convert the RPC packet contents from one protocol to the other.

0.9.5.2 Preferred and Default RPC

DSM-CC User-to-User has designated OMG Universal Networked Objects (UNO) RPC as the default and preferred RPC (see clause 5). The preferred and default data representation is Common Data Representation (CDR).

In the absence of prior arrangement, the default RPC between two DSM-CC Users is the UNO RPC. Note that the UNO RPC supports the ability to subsequently negotiate a change to a different RPC.

0.9.5.3 Local Equivalent Functions

For DSM-CC implementations in which the client and server functions are known to be entirely local (i.e., do not require message exchange over a network), those U-U and U-N primitives that use an RPC may be compiled by an alternative IDL compiler which produces a single equivalent local function call definition. This allows many applications to be simply ported between networked applications and stand-alone applications (e.g., CD-player). Alternatively, if separate server and client processes are executing locally, the RPC protocol may be used without modification.

Information technology — Generic coding of moving pictures and associated audio information

Part 6:

Extensions for Digital Storage Media Command and Control (DSM-CC)

1. General

1.1 Scope

The concepts and protocols of this part of ISO/IEC 13818 (DSM-CC) provide the general capability to browse, select, download, and control a variety of bit stream types. DSM-CC also provides a mechanism to manage network and application resources through the concept of a Session, an associated collection of resources required to deliver a Service. The Session complements a “Service Domain”, a collection of interfaces to browse and select services, and control the delivery of bit streams.

DSM-CC defines the syntax and semantics for a set of User-to-Network and User-to-User protocols:

- DSM-CC Message Header
- U-N Configuration messages
- U-N Session messages and flow diagrams for Session and Resource management
- U-N Download messages
- U-N Switched Digital Broadcast Channel Change Protocol
- U-N Pass Thru messages
- The transport of DSM-CC U-N messages using ISO/IEC 13818-1.
- The transport of generic IP messages using DSM-CC sections and ISO/IEC 13818-1, clause 9
- U-U Remote Procedure Call
- U-U Session interface
- U-U Download interface
- U-U Object Carousel interface
- U-U Local Object interface
- U-U Stream Descriptors

1.2 Profiles and Compliance

The DSM-CC protocols are modular and may be used individually or together to provide the needed range of features and functionality. In other words, an embodiment of DSM-CC is not required to implement every functional category (see below). However, if an embodiment implements operations that would be analogous to a functional category, then the embodiment shall implement the complete syntax and semantics of the corresponding DSM-CC functional category.

1.2.1 Functional Categories of the DSM-CC protocols

- User-to-Network Configuration
- User-to-Network Core Session Messages
- User-to-Network Extended Session Messages
- User-to-Network Flow Controlled Download
- User-to-Network Non-Flow Controlled Download
- User-to-Network Data Carousel Download
- User-to-Network Pass Thru
- User-to-Network Pass Thru Receipt

- User-to-Network Switched Digital Broadcast Channel Change
- User-to-User Core Interfaces
- User-to-User Extended Interfaces

1.2.2 User-to-Network Session Messages

The U-N Session Message protocol has been divided into Core and Extended categories. DSM-CC U-N implementations shall completely support all groups within the Core category (see below). The Extended category has been further divided into independent functional message groups. Implementation of the features/functions provided by the Extended category is not required. However, if an Extended category group is implemented, the complete set of messages within that group shall be implemented.

1.2.2.1 U-N Core Session Message Functional Groups

- Session Setup Group
- Session Release Group
- Add Resource Group
- Delete Resource Group
- Continuous Feed Session Setup Group
- Status Request Group
- Reset Group
- Session Proceeding Group (optional send by Network, required receive by User)
- Session Connect Group (optional send by User, required forward by Network, required receive by both)

1.2.2.2 U-N Extended Session Message Functional Groups

- Session Transfer Group
- Session in Progress Group

1.2.3 User-User Interfaces

The U-U IDL Interfaces have been divided into two categories: Core Interfaces and Extended Interfaces. Each of these is further divided into Consumer and General. The Consumer interfaces are designed for applications where data transfers are primarily from the Server to the Client. Consumer interfaces include file read and video stream control. General interfaces, on the other hand, extend the Consumer interfaces to include author and writer functions. A Client with a General interface can, for example, create Directories and store multimedia objects in them.

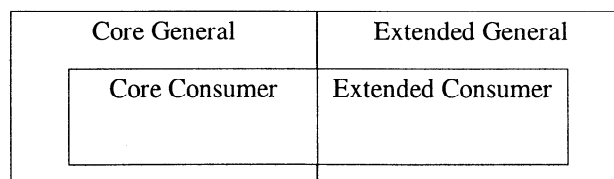


Figure 1-6 U-U IDL Interface Groups

DSM-CC U-U Client implementations shall fully support the Core Consumer Interfaces. DSM-CC U-U Server implementations shall fully support the Core General Interfaces. Each interface within the Extended set of interfaces may be implemented separately; however, if any interface is implemented, it shall be implemented as either the complete Extended Consumer Interface or the complete Extended General Interface.

1.2.3.1 U-U Core Interfaces

- Base common close() and destroy() operations
- Access common permissions, size, history attributes
- Stream to control continuous streams, e.g. video

- File to read and write files
- Directory to create and browse multimedia directories
- Session function calls to perform U-N Session message sequences
- ServiceGateway combined Directory and Session
- First to obtain initial ServiceGateway and application objects

1.2.3.2 U-U Extended Interfaces

- Download function calls to perform U-N Download
- Event to subscribe to data events synchronized with audio/video
- Composite for grouping several application objects in a set
- View to query and store databases
- State to suspend and resume applications
- Interfaces to define and verify new interfaces
- Security to post authentication data for a subsequent request
- Configuration to configure for synchronous or asynchronous RPC
- Life cycle to create an Inter-operable Object Reference
- Kind to test the kind of an object

1.3 Definitions

For the purposes of this part of ISO/IEC 13818, the definitions given in ISO/IEC 13818, ISO/IEC 11172, and the following definitions apply.

- | | | |
|---------|---------------------------|--|
| 1.3.1. | Application | Software that executes in a client environment |
| 1.3.2. | Association Tag | In the case of connection resources, an Association Tag identifies the groups of resources or shared resources that together make up a User to User connection. An Association Tag is unique within a session and has end-to-end significance. |
| 1.3.3. | Client | A consumer of a service from one or more Servers. |
| 1.3.4. | Connection | A transport link that provides the capability to transfer information between two or more end points. |
| 1.3.5. | Downstream | Data delivery from the Server to the Client |
| 1.3.6. | Entity | A functional module within a Subsystem, e.g. a Client Subsystem has a U-N Entity and an U-U Entity. |
| 1.3.7. | Inter-Entity Interface | An interface between two Entities which are in different Subsystems |
| 1.3.8. | Intra-Entity Interface | An interface between two Sub-entities which are both within the same Entity. |
| 1.3.9. | Intra-Subsystem Interface | An interface between two Entities which are in the same Subsystem. |
| 1.3.10. | Main Resident Application | The application (or process) on the Client which is present before execution of any DSM-CC protocols, and is the initiator of the first DSM-CC protocol exchange, e.g. U-N Configuration. |
| 1.3.11. | Network | A collection of communicating elements that provides connections and may provide session control and/or connection control to User(s). |
| 1.3.12. | Primary Service | The first service with which the Client interacts in a related collection of services. |

1.3.13. Resident Download	A resident library capable of performing the DSM-CC Download protocols.
1.3.14. Resource Descriptor	A resource descriptor stores information for a particular resource associated with a session. It contains enough information for the Network to allocate the resource, track the resource once it is allocated, and de-allocate it once it is no longer needed.
1.3.15. Resource Sharing	In a situation where two or more resources are contained within another resource, then that resource is a shared resource. The sharing of the resource is indicated by the shared resource descriptor which identifies the resource number of the shared resource.
1.3.16. Server	A provider of a service to one or more Clients.
1.3.17. Service	A logical entity in the system that provides function(s) and interface(s) in support of one or more applications. The distinction of a service from other objects is that end-user access to it is controlled by a Service Gateway.
1.3.18. Service Gateway	The interface which provides a directory of services and enables a Client to attach to a service domain.
1.3.19. Session	An association between two Users providing the capability to group together the resources needed for an instance of a service.
1.3.20. Session and Resource Manager	A DSM-CC subsystem which provides a logically centralized management of DSM-CC Sessions and Resources over one or more underlying network technologies.
1.3.21. Sub-entity	An internal functional partition of an Entity.
1.3.22. Subsystem	A unit of logical 'equipment' within a DSM-CC System, e.g. Client, Server, or SRM.
1.3.23. System	The embodiment of the entire scope of DSM-CC, including all Subsystems and their interfaces.
1.3.24. Tap	An application-visible object bound to a lower layer communications channel.
1.3.25. Upstream	Data delivery from the Client to the Server.
1.3.26. User	An end system that is connected to a network that can transmit information to or receive information from other such end systems by means of the Network. A User may function as a Client, Server, or both.

1.4 Acronyms

ADSL	Asymmetric Digital Subscriber Loop
AFI	Authority and Format identifier
API	Application Programming Interface
ASN.1/BER	Abstract Syntax Notation 1/Basic Encoding Rules
ATM	Asynchronous Transfer Mode
BIOP	Broadcast Inter-ORB Protocol
CDR	Common Data Representation
CFS	Continuous Feed Session
CORBA	Common Object Request Broker Architecture
CPDU	Common Protocol Data Unit
CRC	Cyclic Redundancy Check/Code
CCP	Channel Change Protocol
DCE	Distributed Computing Environment
DSM	Digital Storage Media

DSM-CC	Digital Storage Media - Command and Control
FCS	Frame Check Sequence
FTTC	Fiber To The Curb
GIT	Generic Identifier Transport (ITU-T)
GPDU	General Protocol Data Unit
HFC	Hybrid Fiber Coax
IDL	Interface Definition Language
IIOP	Internet Inter-ORB Protocol
IOR	Inter-operable Object Reference
ITU	International Telecommunications Union
IP	Internet Protocol
IWU	Inter-Working Unit
LLC	Logical Link Control
MAC	Medium Access Control
MHEG	Multimedia/Hypermedia Experts Group
MPEG	Moving Picture Experts Group
MSL	Multimedia Scripting Language
NDR	Network Data Representation (DCE)
NPT	Normal Play Time
NSAP	Network Service Access Point
OMG	Object Management Group
ONC	Open Networked Computing
OPE	Other Protocol Element (MHEG)
ORB	Object Request Broker
OSI	Open Systems Interconnection
OUI	Organization Unique Identifier
PA	Physical Address
PCR	Program Clock Reference (ISO/IEC 13818-1)
PDU	Protocol Data Unit
PES	Packetized Elementary Stream (ISO/IEC 13818-1)
PID	Packet Identifier (ISO/IEC 13818-1)
PIN	Personal Identification Number
PVC	Permanent Virtual Connection (ATM Forum)
PMT	Program Map Table (ISO/IEC 13818-1)
PS	Program Stream (ISO/IEC 13818-1)
PSI	Program Specific Information (ISO/IEC 13818-1)
RPC	Remote Procedure Call
SDB	Switched Digital Broadcast
SDL	Specification and Description Language
SDV	Switched Digital Video
SE	SubElement
SNAP	SubNetwork Attachment Point
SQL	Structured Query Language
SRM	Session and Resource Manager
STC	System Time Clock (ISO/IEC 13818-1)
SVC	Switched Virtual Connection (ATM Forum)
TCP	Transport Control Protocol
TS	Transport Stream (ISO/IEC 13818-1)
UDP	User Datagram Protocol
U-N	User-to-Network
UNI	User to Network Interface (ITU-T / ATM Forum)
UNO	Universal Network Objects
U-U	User-to-User
VOD	Video On Demand
VCR	Video Cassette Recorder
VCI	Virtual Channel Identifier (ITU-T / ATM Forum)
VPI	Virtual Path Identifier (ITU-T / ATM Forum)

1.5 Normative References

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 13818. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO/IEC 13818 are encouraged to investigate the possibility of applying the most recent edition of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

- American National Standards Institute X3.1351 (1992), *Database Language*. [also known as SQL 92]
- ISO/IEC 8824:1990, *Information technology – Open systems interconnection – Specification of Abstract Syntax Notation One (ASN.1)*.
- ISO/IEC 8825:1990, *Information technology – Open systems interconnection – Specification of basic encoding rules for Abstract Syntax Notation One (ASN.1)*.
- ISO/IEC 11172-1:1993, *Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s – Part 1: Systems*.
- ISO 11578:1996, *Information technology – Open systems interconnection – Remote Procedure Call*.
- ISO/IEC 13818-1:1996, *Information technology – Generic coding of moving pictures and associated audio information: Systems*. [corresponds to ITU-T Rec. H.222.0 (1995)]
- ITU-T Recommendation E.164 (05/97), *The international public telecommunication numbering plan*.
- ITU-T Recommendation Q.931 (03/93), *ISDN user-network interface layer 3 specification for basic call control*.
- ITU-T Recommendation Q.2931 (02/95, 06/97 amendment), *Digital Subscriber Signalling System No.2 – User-network interface (UNI) layer 3 specification for basic call/connection control*.
- ITU-T Recommendation Q.2932.1 (7/96), *Digital Subscriber Signalling System No.2 – Generic functional protocol: Core functions*.
- ITU-T Recommendation Q.2957 (02/95), *Stage 3 description for additional transfer supplementary services using B-ISDN digital subscriber Signalling System No.2 (DSS 2) – Basic Call*.
- ITU-T Recommendation Q.2971 (10/95), *Broadband integrated services digital network (B-ISDN) – Digital subscriber signalling system No.2 (DSS 2) User-network interface layer 3 specification for point-to-multipoint call/connection control*.
- ITU-T Recommendation Z.100 (03/93, 10/96 addendum), *CCITT Specification and description language (SDL)*.
- ITU-T Recommendation Z.120 (10/96), *Message Sequence Chart (MSC)*.
- Internet Engineering Task Force RFC 1014, *XDR: External Data Representation standard*, 06/01/1987.
- Internet Engineering Task Force RFC 1057, *RPC: Remote Procedure Call Protocol specification version 2*, 06/01/1988.
- Object Management Group, *Common Object Request Broker: Architecture and Specification*, Version 2.1, August 1997. [also known as OMG CORBA/IIOP 2.1. Includes definition of the Common Data Representation, Remote Procedure Call mechanism, and Interface Definition Language syntax and semantics]