

INTERNATIONAL
STANDARD

ISO/IEC
13871

First edition
1995-12-15

**Information technology —
Telecommunications and information
exchange between systems — Private
telecommunications networks — Digital
channel aggregation**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseaux privés de
télécommunications — Agrégation de canal numérique*



Reference number
ISO/IEC 13871:1995(E)

Contents	page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative References	2
3 Definitions	2
4 Symbols and Abbreviations	3
5 Selection of ISO/IEC 13871 or ITU-T H.244 aggregation procedures	3
6 Basic Principles	5
6.1 Modes of operation.....	5
6.2 Frame Structure.....	6
6.2.1 Bit Ordering.....	7
6.2.2 Frame Alignment Word (FAW)	7
6.2.3 Frame Count (FC).....	7
6.2.4 Information Channel (IC).....	7
6.2.5 Cyclic Redundancy Check (CRC).....	8
6.2.6 Distribution of Overhead Octets.....	8
6.3 Overall Frame alignment.....	9
6.4 Description of CRC4 procedure.....	10
6.4.1 Computation of the CRC4 bits	10
6.4.1.1 Multiplication and division process	10
6.4.1.2 Encoding procedure	10
6.4.1.3 Decoding procedure	10
6.4.2 Consequent actions	10
6.4.2.1 Enabling and Disabling the CRC procedures	10
6.4.2.2 Action on bit E.....	11
6.4.2.3 Monitoring for error performance.....	11
7 Description of the Information Channel	11
7.1 Information Channel Frame.....	11
7.1.1 Rate Multiplier and Subrate Multiplier Calculation and Operation.....	15
7.2 Information Channel (IC) synchronization.....	19
7.3 Transmission and Recognition of an Information Channel Frame.....	19
8 Procedures	20
8.1 Call Setup	20
8.1.1 Initial Channel Setup	21
8.1.2 Additional Channel Setup	23

© ISO/IEC 1995

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

8.1.3	Delay Equalization	25
8.1.4	Timeout Conditions	25
8.2	Adding Bandwidth to an Existing Call	26
8.2.1	Negotiation (Calling Endpoint Initiated)	26
8.2.2	Negotiation (Answering Endpoint Initiated)	26
8.2.3	Additional Channel Setup	27
8.2.4	Timeout Conditions	28
8.3	Deleting Bandwidth from an Existing Call	28
8.3.1	Calling Endpoint Initiated	29
8.3.2	Answering Endpoint Initiated	30
8.3.3	Timeout Conditions	30
8.4	Collision Resolution	30
8.5	Call Disconnection	30
8.5.1	Calling Endpoint Initiated	30
8.5.2	Answering Endpoint Initiated	30
8.5.3	Timeout Conditions	31
8.6	Remote Loopback	31
8.6.1	Timeout Conditions	32
8.7	Error Conditions	32
8.7.1	Loss of Channel (Other Than Call Setup)	32
8.7.2	Loss of Delay Equalization	33
9	Transparent Mode Operation	33
9.1	Non Aggregating Unit Calling Aggregating Unit	33
9.2	Aggregating Unit Calling Non Aggregating Unit	34
Annexes		
A	RMULT and SUBMULT Values	35
A.1	Bearer Channel Rate (BCR) = 56 kbit/s	35
A.2	Bearer Channel Rate (BCR) = 64 kbit/s	37
B	Manufacturer's Identifiers	39
C	Phone Number Length Extension	40
D	State Machine Description of Channel Aggregation Control	41
D.1	Reference Architecture	41
D.2	State Definitions	42
D.2.1	DEQ Negotiation Control	42
D.2.2	DEQ MULTIFRAME CONTROL States	44
D.3	Messages and Events	44
D.3.1	Information Channel Messages	45
D.3.2	DEQ Negotiation Control to Call Control Messages	46
D.3.3	DEQ Negotiation Control to DEQ Multiframe Control Primitives	50
D.4	Timers	53
D.5	State Transition Diagrams	54
D.5.1	DEQ Negotiation Control	54
D.5.2	DEQ Multiframe Control	58
D.6	SDL Diagrams	59
D.6.1	DEQ Negotiation Control	60
D.6.2	DEQ Multiframe Control	87

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 13871 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

Annexes A to C form an integral part of this International Standard. Annex D is for information only.

Introduction

This International Standard is one of a set of International Standards designed to facilitate the global interconnection of applications across both private telecommunications networks and public ISDNs. This is achieved by ensuring compatibility and interworking of services offered by the private and public networks.

In line with the above aims, this International Standard defines a service offering flexible bandwidth allocation that provides unrestricted information transfer between special terminal adapters called Channel Aggregation Units. A Channel Aggregation Unit can provide a high bandwidth capability to an attached terminal application by combining multiple 56 kbit/s or 64 kbit/s digital communications channels that are available across public and/or private networks. It also ensures that bit sequence integrity of the aggregated bandwidth is maintained across the network(s). The number of individual communications channels aggregated may range from one up to the practical limits imposed by the Channel Aggregation Unit.

The service defined in this International Standard can be used for a number of applications, including

- o LAN interconnection
- o image transfer
- o bulk file transfer
- o video conferencing.

ITU-T Recommendation H.244 defines the means by which the appropriate choice of channel aggregation procedures may be made, in accordance with the requirements of the application being served. This choice is made from two available sets of procedures, one of which is also defined by ITU-T Recommendation H.244, the other of which is defined in this International Standard.

Information technology - Telecommunications and information exchange between systems - Private telecommunications networks - Digital channel aggregation

1 Scope

This International Standard defines a set of procedures collectively called 'Digital Channel Aggregation', which are used in the provision of an aggregated bearer service. Digital channel aggregation involves a means for the combination of multiple switched or unswitched 56 kbit/s or 64 kbit/s digital communications channels across one or more public and/or private networks into higher bandwidth digital bi-directional channels between Channel Aggregation Units (CAUs) serving terminal applications at network endpoints. Figure 1 below illustrates a typical channel aggregation scenario.

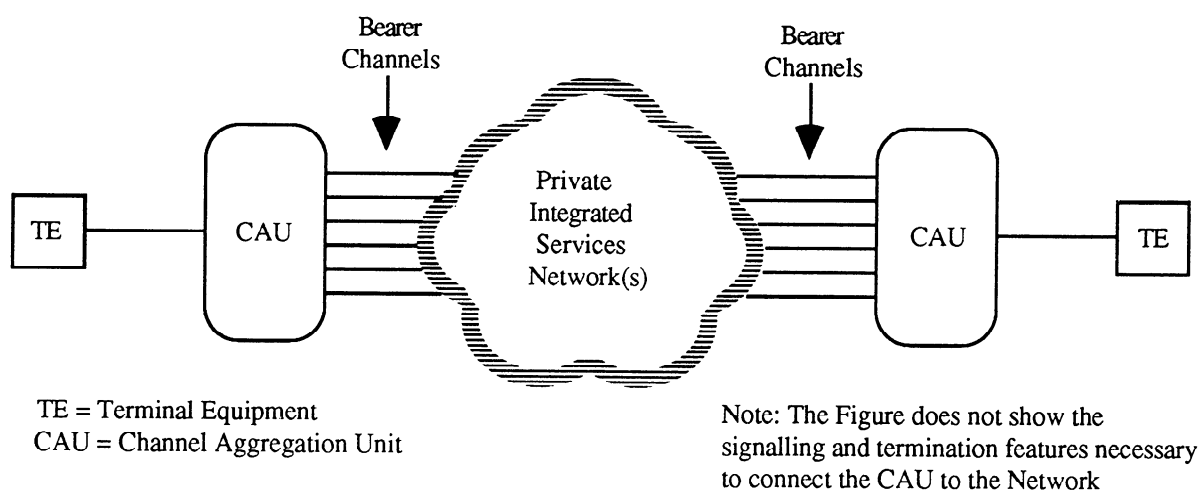


Figure 1 - Channel Aggregation Scenario

In defining the channel aggregation procedures, this International Standard sets out the means used by a CAU to

- o establish the parameters to be used for the aggregated connection
- o synchronise and align multiple communications channels to maintain the bit sequence integrity of the aggregated bandwidth across the network(s)
- o optionally monitor data transfer throughout a call to detect failure modes
- o institute failure recovery procedures
- o optionally dynamically vary the bandwidth on demand during a call.

The channel aggregation procedures above are defined at the interface between the CAU and the network in terms of the frame structure and information messages applied to individual communications channels. Not defined by this International Standard are

- o the call control procedures used to establish and disconnect the individual communications channels that make up the higher bandwidth connections
- o the higher level protocols or applications that use the channel aggregation services
- o the frame structure on the individual communications channels at the physical interface between the CAU and the network as required for 'normal' 56 kbit/s or 64 kbit/s bearer services as opposed to aggregated bearer services
- o the electrical characteristics of the individual communications channels at the physical interface between the CAU and the network.

2 Normative References

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/IEC 11571:1994, *Information technology - Telecommunications and information exchange between systems - Numbering and sub-addressing in private integrated services networks.*

ITU-T Recommendation G.704 (1991), *Synchronous frame structures used at primary and secondary hierarchical levels.*

ITU-T Recommendation H.221 (1994), *Frame structure for a 64 to 1920 kbit/s channel in audiovisual teleservices.*

ITU-T Draft Recommendation H.244 (1995), *Synchronized aggregation of ISDN-B channels.*

ITU-T Recommendation H.320 (1994), *Narrow-band visual telephone systems and terminal equipment.*

ITU-T Recommendation I.112 (1992), *Vocabulary of terms for ISDNs.*

ITU-T Recommendation T.35 (1991), *Procedure for the allocation of CCITT defined codes for non-standard facilities.*